


MODBOARD

LFO daughterboard

Build Document last updated may 2016
for PCB version 1.0

The "Modboard" is a small trianglewave LFO daughterboard that you can hook up to other circuits to create new sounds. Many Parasit Studio board will have modboard connections in future revisions.

It's possible to hook this up to just about any potentiometer that is configured as a variable resistor, to modulate it's function. But you will need to experiment with different vactrols (or LED+LDR combinations) to find the ones best suited for the task.

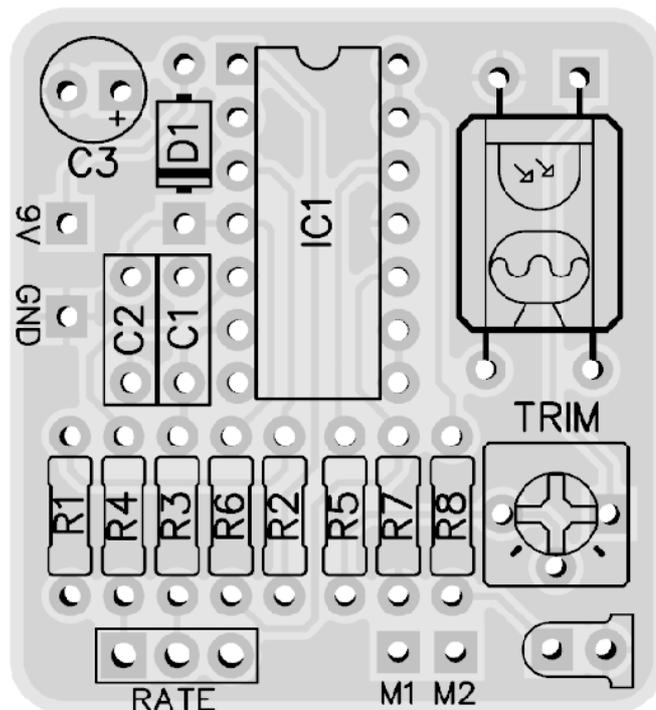

General build tips


- Solder the low profile components first, from short to tall. Recommended order: resistors, diodes, IC socket, film-caps, electrolytics.
- Pay special attention to the orientation of the diodes and electrolytics.
- Always use sockets for IC chips and transistors to avoid heating them directly. It also makes it much easier to swap them out if needed.
- It's a good idea to use sockets for the vactrol aswell until you have tested it.
- The modboard is not designed for a board mounted pot, switch or rate indicator LED, so these will have to be wired offboard.
- The square hole represents pot pin 1 of the rate pot.

Modboard Bill of Materials (BOM)

Resistors	IC's
R1 33K	IC1 LM324
R2 47K	
R3 470K	Potentiometers
R4 2.2K	RATE B100K
R5 4.7K	trimmer 10K
R6 470K	Switches
R7 470K	1x SPDT on/on
R8 4.7K*	
Capacitors	Diodes
C1 100nF	D1 1N5817
C2 100nF	1x LED (rate indicator)
C3 47uF	1x vactrol (or 1x LED + 1x LDR)

- * Current limiting resistor for the rate indicator LED. Use the appropriate value for your type LED
- Adjust the trimmer for modulation strenght

Wiring the boards together

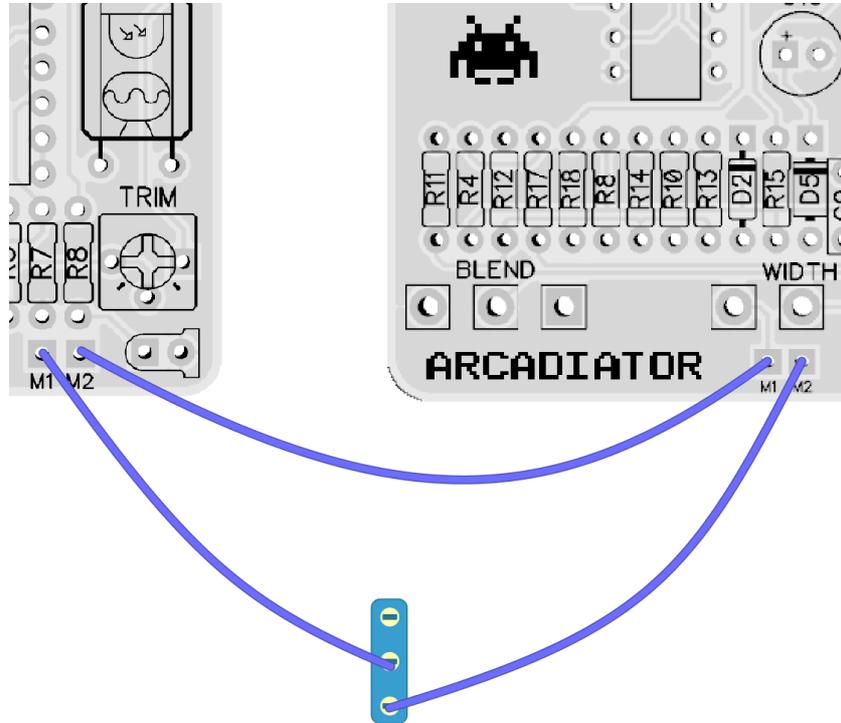

Here is the Arcadiator 2.0 board as an example.

- Wire one of the M1 or M2 modboard connections together with one of the M1 or M2 connections on the main effect board. Which one goes to which one doesn't matter.
- Put the other modboard connection to pin 2 on a SPDT (on/on) switch. This switch will allow you to disengage the Modboard.
- Wire the SPDT lug 3 to the other M connection on the main effect board.

Vactrols / LED+LDR

You can either use a vactrol or make your own with a combination of LED+LDR wrapped in shrinktube. Vactrol connections:

- The top left hole is for the negative (cathode) for the LED side
- The bottom holes are for the LDR side (unidirectional)

Troubleshooting

There's always a chance of running into trouble. To minimize error, follow the BOM and general building tips carefully. Take your time and don't rush. Take a break now and then. Use good solder, and it helps to have a decent soldering station instead of a cheap iron.

If you are still having trouble, please visit the madbean forum Parasit Studio subforum section and ask for help there.

<http://www.madbeanpedals.com/forum/index.php?board=84.0>

If you have bought the Musikding kit and have received a faulty or missing component, please contact musikding directly.

<https://www.musikding.de/kontakt.php?lang=eng>

Terms of use

PCB's from Parasit Studio are intended for DIY use only. Commercial resale is not allowed. It's meant for personal use, which means that it's not allowed to build a lot of pedals and sell them for profit to strangers using public forums and craigslist ads. However, it's totally ok to build a few pedals and sell to your friends and bandmates. After all, that's what this hobby is about. DIY or DIE!

www.parasitstudio.se
parasitstudio@gmail.com